


HV155 Series



General Specifications

Partnumber	Voltage (V)	Reduction (:1)	Length (mm)	Diameter (mm)	Nominal torque (mNm)	Speed at nominal torque	Current (A)
HV155-12-10	12	10	61,5	30,0	50	460	0,62
HV155-24-10	24	10	61,5	30,0	50	460	0,30
HV155-12-21	12	20,8	61,5	30,0	100	235	0,60
HV155-24-21	24	20,8	61,5	30,0	100	235	0,285
HV155-12-43	12	43,3	67	30,0	180	115	0,58
HV155-24-43	24	43,3	67	30,0	180	115	0,28
HV155-12-90	12	90,3	67	30,0	250	62	0,44
HV155-24-90	24	90,3	67	30,0	250	62	0,215

Mechanical Dimensions

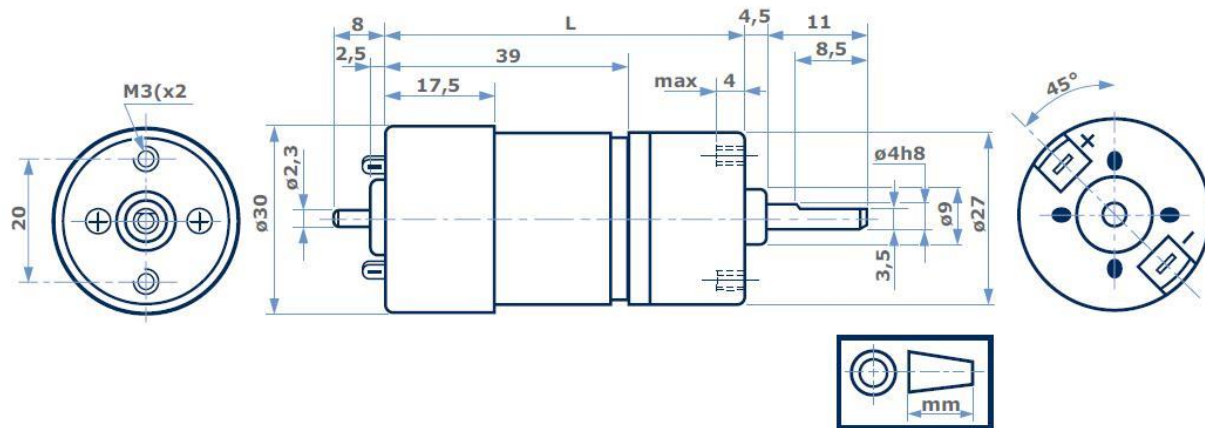

The resistance can be chosen with respect to the required torque and supplied voltage

- VDR interference suppression on the collector
- Direction of rotation depending on polarity
- Can be mounted in any position
- Maximum radial shaft load: 10N
- Maximum axial shaft load: 5N
- Temperature range: -20°C/60°C
- Approx weight: 100g